

TERMINAL PROCEDURES TABLE OF CONTENTS

Inoperative Components or Visual Aids Table.....	A1
Explanation of Terms/Landing Minima Data.....	B1
General Information.....	C1
Abbreviations.....	D1
Legend—IAP Planview.....	E1
Legend—IAP Profile.....	F1
Legend—Standard Terminal Arrival Charts.....	G1
Legend—Departure Procedure Charts.....	G2
Legend—Airport Diagram/Sketch.....	HI
Legend—Approach Lighting Systems.....	I1
Frequency Pairing.....	J1
Index of Terminal Charts and Minimums.....	K1
IFR Takeoff Minimums, Departure Procedures, and Diverse Vector Area (Radar Vectors).....	L1
IFR Alternate Airport Minimums.....	M1
Radar Minimums.....	N1
Land and Hold-Short Operations (LAHSO).....	O1
Hot Spots.....	P1
Standard Terminal Arrival Charts.....	Z1
Terminal Charts.....	Page 1
Rate of Climb/Descent Table.....	Inside Back Cover
Area of Coverage.....	Back Cover
CORRECTIONS, COMMENTS AND/OR PROCUREMENT FOR CHARTING ERRORS, OR FOR CHANGES, ADDITIONS, RECOMMENDATIONS ON PROCEDURAL ASPECTS CONTACT: FAA, Aeronautical Information Services 1305 East-West Highway SSMC 4, Room 4531 Silver Spring, MD 20910-3281 Telephone: 1-800-638-8972 https://www.faa.gov/air_traffic/flight_info/aeronav/aero_data/ For inquiries regarding military charts, please contact aerohelp@nga.mil FOR PROCUREMENT: For digital products, visit our website at: https://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/ For a list of approved FAA Print Providers, visit our website at: https://www.faa.gov/air_traffic/flight_info/aeronav/print_providers/ Frequently asked questions (FAQ) are answered on our website at: https://www.faa.gov/go/ais See the FAQs prior to contact via toll free number or email. Request for the creation or revisions to Airport Diagrams should be in accordance with FAA Order 7910.4	

INOPERATIVE COMPONENTS OR VISUAL AIDS TABLE
(For Civil Use Only)

Straight-in and Sidestep landing minimums published on instrument approach procedure charts are based on full operation of all components and visual aids (see exception below for ALSF 1 & 2) associated with the particular approach chart being used. Higher minimums are required with inoperative components or visual aids as indicated below. If more than one component is inoperative, each minimum is raised to the highest minimum required by any single component that is inoperative. ILS glideslope inoperative minimums are published on the instrument approach charts as localizer minimums. This table applies to approach categories A thru D and is to be used unless amended by notes on the approach chart. Such notes apply only to the particular approach category(ies) as stated. Category E inoperative notes will be specified when published on civil charts. The inoperative table does not apply to Circling minimums. See legend page for description of components indicated below.

Full Operation Exception: For ALSF 1 & 2 operated as SSALR, or when the sequenced flashing lights are inoperative, there is no effect on visibility for ILS lines of minima.

(1) ILS, PAR, LPV, GLS minima

Inoperative Component or Visual Aid	Increase Visibility
All ALS types (except ODALS)	¼ mile

(2) ILS, LPV, GLS with visibility minima of RVR 1800†/2000*/2200*

Inoperative Component or Visual Aid	Increase Visibility
ALSF 1 & 2, MALSR, SSALR	To RVR 4000† To RVR 4500*
TDZL or RCLS	To RVR 2400#
RVR	To ½ mile

#For ILS, LPV, GLS procedures with a 200 foot HAT, RVR 1800 authorized with use of FD or AP or HUD to DA.

(3) All Approach Types and all lines of minima other than (1) & (2) above

Inoperative Component or Visual Aid	Increase Visibility
ALSF 1 & 2, MALSR, SSALR	½ mile
MALSF, MAL, SSALF, SSALS, SALSF, SALS	¼ mile

(4) Sidestep minima (CAT C-D)

Inoperative Component or Visual Aid to Sidestep Runway	Increase Visibility
ALSF 1 & 2, MALSR, SSALR	½ mile

(5) All Approach Types, All lines of minima

Inoperative Component or Visual Aid	Increase Visibility
ODALS (CAT A-B)	¼ mile
ODALS (CAT C-D)	⅛ mile

TERMS/LANDING MINIMA DATA 20142

IFR LANDING MINIMA

The United States Standard for Terminal Instrument Procedures (TERPS) is the approved criterion for formulating instrument approach procedures. Landing minima are established for six aircraft approach categories (ABCDE and COPTER). In the absence of COPTER MINIMA, helicopters may use the CAT A minimums of other procedures.

LANDING MINIMA FORMAT

In this example airport elevation is 1179, and runway touchdown zone elevation is 1152.

DA
Visibility
(RVR 100's of feet)

Aircraft Approach Category
HAT

200 (200-½)

288 (300-½)

1440/50
288 (300-1)

1540-1
361 (400-1)

1640-1
461 (500-1)

1640-1½
461 (500-1½)

1740-2
561 (600-2)

MDA

HAA

Visibility in Statute Miles

Straight-in ILS to Runway 27

Straight-in with Glide Slope Inoperative or not used to Runway 27

All weather minimums in parentheses not applicable to Civil Pilots.
Military Pilots refer to appropriate regulations.

CATEGORY	A	B	C	D
S-ILS 27	1352/24		200 (200-½)	
S-LOC 27	1440/24	288 (300-½)		1440/50 288 (300-1)
CIRCLING	1540-1 361 (400-1)	1640-1 461 (500-1)	1640-1½ 461 (500-1½)	1740-2 561 (600-2)

COPTER MINIMA ONLY

CATEGORY	COPTER
H-176°	680-½ 363 (400-½)

Copter Approach Direction

Height of MDA/DA Above Landing Area (HAL)

No circling minimums are provided

NOTE: The **W** symbol indicates outages of the WAAS vertical guidance may occur daily at this location due to initial system limitations. WAAS NOTAMS for vertical outages are not provided for this approach. Use LNAV minima for flight planning at these locations, whether as a destination or alternate. For flight operations at these locations, when the WAAS avionics indicate that LNAV/VNAV or LPV service is available, then vertical guidance may be used to complete the approach using the displayed level of service. Should an outage occur during the procedure, reversion to LNAV minima may be required. As the WAAS coverage is expanded, the **W** will be removed.

RNAV minimums are dependent on navigation equipment capability, as stated in the applicable AFM, AFMS, or other FAA approved document. See AIM paragraph 5-4-5, AC 90-105 and AC 90-107 for detailed requirements for each line of minima.

COLD TEMPERATURE AIRPORTS

NOTE: A **⚡**-12°C symbol indicates a cold temperature altitude correction is required at this airport when reported temperature is at or below the published temperature. See the following Cold Temperature Error Table to make manual corrections. Advise ATC with altitude correction. Advising ATC with altitude corrections is not required in the final segment. See Aeronautical Information Manual (AIM), Chapter 7, for guidance and additional information. For a complete list, see the "Cold Temperature Airports" link under the Additional Resources heading at the bottom of the following page: http://www.faa.gov/air_traffic/flight_info/aeronav/digital_products/dtpp/search/

COLD TEMPERATURE ERROR TABLE
HEIGHT ABOVE AIRPORT IN FEET

REPORTED TEMP °C	200	300	400	500	600	700	800	900	1000	1500	2000	3000	4000	5000
+10	10	10	10	10	20	20	20	20	20	30	40	60	80	90
0	20	20	30	30	40	40	50	50	60	90	120	170	230	280
-10	20	30	40	50	60	70	80	90	100	150	200	290	390	490
-20	30	50	60	70	90	100	120	130	140	210	280	420	570	710
-30	40	60	80	100	120	140	150	170	190	280	380	570	760	950
-40	50	80	100	120	150	170	190	220	240	360	480	720	970	1210
-50	60	90	120	150	180	210	240	270	300	450	590	890	1190	1500

AIRCRAFT APPROACH CATEGORIES

Aircraft approach category indicates a grouping of aircraft based on a speed of VREF, if specified, or if VREF not specified, 1.3 VSO at the maximum certificated landing weight. VREF, VSO, and the maximum certificated landing weight are those values as established for the aircraft by the certification authority of the country of registry. Helicopters are Category A aircraft. An aircraft shall fit in only one category. When necessary to operate the aircraft at an airspeed in excess of the maximum airspeed of its certified aircraft approach category, pilots should use the applicable higher category minima. For additional options and to ensure the aircraft remains within protected airspace, consult the AIM. See following category limits:

MANEUVERING TABLE

Approach Category	A	B	C	D	E
Speed (Knots)	0-90	91-120	121-140	141-165	Abv 165

TERMS/LANDING MINIMA DATA 20142

NE-2, 31 OCT 2024 to 26 DEC 2024

NE-2, 31 OCT 2024 to 26 DEC 2024

TERMS/LANDING MINIMA DATA 19339

CIRCLING APPROACH OBSTACLE PROTECTED AIRSPACE

The circling MDA provides vertical obstacle clearance during a circle-to-land maneuver. The circling MDA protected area extends from the threshold of each runway authorized for landing following a circle-to-land maneuver for a distance as shown in the tables below. The resultant arcs are then connected tangentially to define the protected area.

STANDARD CIRCLING APPROACH MANEUVERING RADIUS

Circling approach protected areas developed prior to late 2012 used the radius distances shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category. The approaches using standard circling approach areas can be identified by the absence of the **C** symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
All Altitudes	1.3	1.5	1.7	2.3	4.5

C EXPANDED CIRCLING APPROACH MANEUVERING AIRSPACE RADIUS

Circling approach protected areas developed after late 2012 use the radius distance shown in the following table, expressed in nautical miles (NM), dependent on aircraft approach category, and the altitude of the circling MDA, which accounts for true airspeed increase with altitude. The approaches using expanded circling approach areas can be identified by the presence of the **C** symbol on the circling line of minima.

Circling MDA in feet MSL	Approach Category and Circling Radius (NM)				
	CAT A	CAT B	CAT C	CAT D	CAT E
1000 or less	1.3	1.7	2.7	3.6	4.5
1001-3000	1.3	1.8	2.8	3.7	4.6
3001-5000	1.3	1.8	2.9	3.8	4.8
5001-7000	1.3	1.9	3.0	4.0	5.0
7001-9000	1.4	2.0	3.2	4.2	5.3
9001 and above	1.4	2.1	3.3	4.4	5.5

Comparable Values of RVR and Visibility

The following table shall be used for converting RVR to ground or flight visibility. For converting RVR values that fall between listed values, use the next higher RVR value; do not interpolate. For example, when converting 4800 RVR, use 5000 RVR with the resultant visibility of 1 mile.

RVR (feet)	Visibility (SM)	RVR (feet)	Visibility (SM)	RVR (feet)	Visibility (SM)	RVR (feet)	Visibility (SM)
1600	¼	2400	½	3500	¾	5500	1
1800	½	2600	½	4000	¾	6000	1¼
2000	½	3000	¾	4500	¾		
2200	½	3200	¾	5000	1		

RADAR MINIMA

	RWY	GP/TCH/RPI	CAT	DA/ MDA-VIS	HAT HAA	CEIL-VIS	CAT	DA/ MDA-VIS	HAT HAA	CEIL-VIS
PAR	10	2.5°/42/1000	ABCDE	195/16	100	(100-¼)				
	28	2.5°/48/1068	ABCDE	187/16	100	(100-¼)				
ASR	10		ABC	560/40	463	(500-¾)	DE	560/50	463	(500-1)
	28		AB	600/50	513	(600-1)	CDE	600/60	513	(600-1¼)
CIR	10		AB	560-1¼	463	(500-1¼)	CDE	560-1½	463	(500-1½)
	28		AB	600-1¼	503	(600-1¼)	CDE	600-1½	503	(600-1½)

Radar Minima:

1. Minima shown are the lowest permitted by established criteria. Pilots should consult applicable directives for their category of aircraft.
2. The circling MDA and weather minima to be used are those for the runway to which the final approach is flown- not the landing runway. In the above RADAR MINIMA example, a category C aircraft flying a radar approach to runway 10, circling to land on runway 28, must use an MDA of 560 feet with weather minima of 500-1½.

NOTE: Military RADAR MINIMA may be shown with communications symbology that indicates emergency frequency monitoring capability by the radar facility as follows: (E) VHF and UHF emergency frequencies monitored
(V) VHF emergency frequency (121.5) monitored
(U) UHF emergency frequency (243.0) monitored

Additionally, unmonitored frequencies which are available on request from the controlling agency may be annotated with an "x".

- ⚠ Alternate Minimums not standard. Civil users refer to tabulation. USA/USN/USAF pilots refer to appropriate regulations.
- ⚠ NA Alternate minimums are Not Authorized due to unmonitored facility or absence of weather reporting service.
- ⚠ Airport is published in the Takeoff Minimums, (Obstacle) Departure Procedures, and Diverse Vector Area (Radar Vectors) tabulation.

TERMS/LANDING MINIMA DATA 19339

NE-2, 31 OCT 2024 to 26 DEC 2024

NE-2, 31 OCT 2024 to 26 DEC 2024

GENERAL INFORMATION

This publication is issued every 56 days and includes Standard Instrument Approach Procedures (SIAPS), Standard Instrument Departures (SIDs), Standard Terminal Arrivals (STARs), IFR Takeoff Minimums and (Obstacle) Departure Procedures (ODPs), IFR Alternate Minimums, and Radar Instrument Approach Minimums for use by civil and military aviation. The organization responsible for SIAPs, Radar Minimums, SIDs, STARs and graphic ODPs is identified in parentheses in the top margin of the procedure; e.g., (FAA), (FAA-O), (USA), (USAF), (USN). SIAPS with the (FAA) and (FAA-O) designation are regulated under 14 CFR, Part 97. SIAPs with the (FAA-O) designation have been developed by an authorized non-FAA service provider. See 14 CFR, Part 91.175 (a) and the AIM for further details. 14 CFR, Part 91.175 (g) and the Special Notices section of the Chart Supplement contain information on civil operations at military airports.

The FAA uses an internal numbering system on all charts in the TPP. This Approach and Landing (AL) number is located on the top center margin of the chart followed by the organization responsible for the procedure in parentheses, e.g., AL-18 (FAA), AL-11919 (FAA-O). Military procedures do not show AL number, but do show the appropriate authority for the procedure, e.g., (USAF).

CHART CURRENCY INFORMATION

Date of Latest Revision 09365

The Date of Latest Revision identifies the Julian date the chart was added or last revised for any reason. The first two digits indicate the year, the last three digits indicate the day of the year (001 to 365/6) in which the latest revision of any kind has been made to the chart.



The FAA Procedure Amendment Number represents the most current amendment of a given procedure. The Procedure Amendment Effective Date represents the AIRAC cycle date on which the procedure amendment was incorporated into the chart. Updates to the amendment number & effective date represent procedural/criteria revisions to the charted procedure, e.g., course, fix, altitude, minima, etc. On Departure Procedures and Standard Terminal Arrivals, procedural revisions to the current chart are indicated by an upnumber to the procedure title with the procedure amendment effective date following. On Radar Minima, Takeoff Minimums and (Obstacle) Departure Procedures and Diverse Vector Areas, the FAA Procedure Amendment Number, Procedure Effective Date, and the Julian Date of Last Revision will be shown on the same line, e.g., AMDT 2 10DEC15 (15344).

MISCELLANEOUS

- ★ Indicates a non-continuously operating facility, see Chart Supplement.
- For Civil (FAA) instrument procedures, "RADAR REQUIRED" in the planview of the chart indicates that ATC radar must be available to assist the pilot when transitioning from the en route environment. "Radar required" in the pilot briefing portion of the chart indicates that ATC radar is required on portions of the procedure outside the final approach segment, including the missed approach. Some military procedures also have equipment requirements such as "Radar Required", but do not conform to the same charting application standards used by the FAA.
- Distances are in nautical miles (except visibility in statute miles and Runway Visual Range in hundreds of feet). Runway dimensions are in feet. Elevations are in feet, Mean Sea Level (MSL). Ceilings are in feet above airport elevation. Radials/bearings/headings/courses are magnetic. Horizontal Datum: Unless otherwise noted on the chart, all coordinates are referenced to North American Datum 1983 (NAD 83), which for charting purposes is considered equivalent to World Geodetic System 1984 (WGS 84).
- Terrain is scaled within the neat lines (planview boundaries) and does not accurately underlie not-to-scale distance depictions or symbols.

NE-2, 31 OCT 2024 to 26 DEC 2024

NE-2, 31 OCT 2024 to 26 DEC 2024

STANDARD TERMINAL ARRIVALS AND DEPARTURE PROCEDURES

The use of the associated codified STAR/DP and transition identifiers are requested of users when filing flight plans online. It must be noted that when filing a STAR/DP with a transition, the first three coded characters of the STAR and the last three coded characters of the DP are replaced by the transition code. Examples: ACTON SIX ARRIVAL, file (AQN.AQN6); ACTON SIX ARRIVAL, EDNAS TRANSITION, file (EDNAS.AQN6). FREEHOLD THREE DEPARTURE, file (FREH3.RBV), FREEHOLD THREE DEPARTURE, ELWOOD CITY TRANSITION, file (FREH3.EWC).

PROCEDURE PBN/EQUIPMENT REQUIREMENTS

Users will begin to see Performance-Based Navigation (PBN) Requirements and Equipment Requirements on Instrument Approach Procedures (IAPs), RNAV STARs and RNAV DPs prominently displayed in separate, standardized notes boxes. For procedures with PBN elements, the PBN box will contain the procedure's navigation specification(s); and, if required: specific sensors or infrastructure needed for the navigation solution; any additional or advanced functional requirements; the minimum Required Navigation Performance (RNP) value and any amplifying remarks. Items listed in this PBN box are REQUIRED for the procedure's PBN elements. The Equipment Requirements Box will list non-PBN requirements. On charts with both PBN elements and equipment requirements, the PBN requirements box will be listed first. The publication of these notes will continue incrementally until all charts have been amended to comply with the new standard.

IAP PBN/Equipment Requirements Notes Box

PBN Requirements Box

Equipment Requirements Box

Standard Procedure Notes Box

From WINRZ, LIBGE: RNAV-1 GPS, RNAV-1 GPS from MAP to YARKU.

DME required for LOC only.

▼

 Circling to Rwy 25 NA at night.
For inop MALSR increase S-ILS 16R all cats visibility to 2½ SM.

RNAV STAR and DP PBN/Equipment Requirements Notes Box

PBN Requirements Box

Equipment Requirements Box

RNAV 1 - DME/DME/IRU or GPS

RADAR required

PILOT CONTROLLED AIRPORT LIGHTING SYSTEMS

Reference the Chart Supplement for detailed information on pilot controlled lighting (PCL) systems.

Available FAA standard approach lighting systems are charted as a negative symbol to indicate pilot controlled lighting, e.g.,  

Available airport lighting systems that are charted as notes, e.g. REIL, MIRL, are shown with a negative "" symbol beside the name to indicate pilot controlled lighting.

To activate lights, use frequency indicated in the communications section of the chart with a 

KEY MIKE

- 7 times within 5 seconds
- 5 times within 5 seconds
- 3 times within 5 seconds

FUNCTION

- Highest intensity available
- Medium or lower intensity (Lower REIL or REIL-off)
- Lowest intensity available (Lower REIL or REIL-off)

ABBREVIATIONS 24249

AAF.....	Army Air Field	D-ATIS.....	Digital-Automatic Terminal Information Service
AAUP.....	Attention All Users Page	DA.....	Decision Altitude
ADF.....	Automatic Direction Finder	DEP.....	Departure
ADIZ.....	Air Defense Identification Zone	DEP CON.....	Departure Control
AFAUX.....	Air Force Auxiliary	DER.....	Departure End of Runway
AFB.....	Air Force Base	DH.....	Decision Height
AFRC.....	Armed Forces Reserve Center/Air Force Reserve Command	DME.....	Distance Measuring Equipment
AGL.....	Above Ground Level	DP.....	Departure Procedure
AFHP.....	Air Force Heliport	DTHR.....	Displaced Runway Threshold
AFIS.....	Automatic Flight Information Service	DVA.....	Diverse Vector Area
AHP.....	Army Heliport	ELEV.....	Elevation
ALF.....	Auxiliary Landing Field	EMAS.....	Engineered Material Arresting System
ALS.....	Approach Light System	EXEC.....	Executive
ALSF.....	Approach Light System with Sequenced Flashing Lights	FAF.....	Final Approach Fix
ANGB.....	Air National Guard Base	FD.....	Flight Director System
ANGS.....	Air National Guard Station	FL.....	Flight Level
Ant.....	Antenna	FLD.....	Field
AOB.....	At or Below	FM.....	Fan Marker
AP.....	Autopilot System	FMS.....	Flight Management System
APCH.....	Approach	GBAS.....	Ground Based Augmentation System
APP CON.....	Approach Control	GCA.....	Ground Control Approach
AR.....	Authorization Required	GCO.....	Ground Communication Outlet
ARB.....	Air Reserve Base	GLS.....	Ground Based Augmentation System
ARPT.....	Airport	GP.....	Landing System
ARR.....	Arrival	GPS.....	Glidepath
AS.....	Air Station	GS.....	Global Positioning System
ASOS.....	Automated Surface Observing System	HAA.....	Glide Slope
ASR.....	Airport Surveillance RADAR	HAL.....	Height Above Airport
ASSC.....	Airport Surface Surveillance Systems	HAT.....	Height Above Landing
ATC.....	Air Traffic Control	HATH.....	Height Above Touchdown
ATCT.....	Airport Traffic Control Tower	HCH.....	Height Above Threshold
ATIS.....	Automatic Terminal Information Service	hdg.....	Heliport Crossing Height
AUNICOM.....	Automated UNICOM	HIRL.....	Heading
AWOS.....	Automated Weather Observing System	HUD.....	High Intensity Runway Lights
Baro-VNAV.....	Barometric Vertical Navigation	IAF.....	Head-up Display
BC.....	Back Course	IAP.....	Initial Approach Fix
brg.....	Bearing	ICAO.....	Instrument Approach Procedure
CAPT.....	Captain	IF.....	International Civil Aviation Organization
CAT.....	Category	IFR.....	Intermediate Fix
CCW.....	Counterclockwise	ILS.....	Instrument Flight Rules
CDI.....	Course Deviation Indicator	IM.....	Instrument Landing System
CGAS.....	Coast Guard Air Station	INC.....	Inner Marker
Chan.....	Channel	Inop.....	Incorporated
CIR.....	Circling	INT.....	Inoperative
CL.....	Centerline Lighting System	INTCNTL.....	Intersection
CLNC DEL.....	Clearance Delivery	INTL.....	Intercontinental
CNF.....	Computer Navigation Fix	JNGB.....	International
CPDLC.....	Controller Pilot Data Link Communications	JRB.....	Joint National Guard Base
CTAF.....	Common Traffic Advisory Frequency	K.....	Joint Reserve Base
CW.....	Clockwise	KIAS.....	Knots
		LAAS.....	Knots Indicated Airspeed
			Local Area Augmentation System

ABBREVIATIONS 24249

LDA.....	Localizer Type Directional Aid	OPSPEC.....	Operations Specification
Ldg.....	Landing	PAR.....	Precision Approach Radar
LIRL.....	Low Intensity Runway Lights	PDC.....	Pre-Departure Clearance
LNAV.....	Lateral Navigation	PRM.....	Precision Runway Monitor
LOA.....	Letter of Agreement/Authorization	Pvt.....	Private
LOC.....	Localizer	R.....	Radial
LOM.....	Locator Outer Marker	RA.....	Radio Altimeter setting height
LP.....	Localizer Performance	RAIL.....	Runway Alignment Indicator Lights
LPV.....	Localizer Performance with Vertical Guidance	RCLS.....	Runway Centerline Light System
LR.....	Lead Radial	REIL.....	Runway End Identifier Lights
LRRS.....	Long Range RADAR Station	RF.....	Radius to Fix
MAA.....	Maximum Authorized Altitude	RGNL.....	Regional
MALS.....	Medium Intensity Approach Lighting System	RLLS.....	Runway Lead-in Light System
MALSF.....	Medium Approach Lighting System with Sequenced Flashers	RNAV.....	Area Navigation
MALSR.....	Medium Intensity Approach Lighting System with Runway Alignment Indicator Lights	RNP.....	Required Navigation Performance
MAP.....	Missed Approach Point	RPI.....	Runway Point of Interception)
MCAF.....	Marine Corps Air Facility	RVR.....	Runway Visual Range
MCALF.....	Marine Corps Auxiliary Landing Field	RWY.....	Runway
MCAS.....	Marine Corps Air Station	S.....	Straight-in
MCB.....	Marine Corps Base	SALS.....	Simplified Short Approach Light System
MCOLF.....	Marine Corps Outlying Field	SALSF.....	Short Approach Lighting System with Sequenced Flashing Lights
MDA.....	Minimum Descent Altitude	SDF.....	Simplified Directional Facility
MEA.....	Minimum Enroute Altitude	SFB.....	Space Force Base
MEML.....	Memorial	SID.....	Standard Instrument Departure
METRO.....	Metropolitan	SM.....	Statute Mile
MIRL.....	Medium Intensity Runway Lights	SR-SS.....	Sunrise-Sunset
MM.....	Middle Marker	SSALF.....	Short Approach Lighting System with Sequenced Flashing Lights
MOCA.....	Minimum Obstruction Clearance Altitude	SSALR.....	Simplified Short Approach Light System with Runway Alignment Indicator Lights
MRA.....	Minimum Reception Altitude	SSALS.....	Simplified Short Approach Lighting System
MSL.....	Mean Sea Level	ST.....	Saint
MSPEC.....	Management Specification	STE.....	Sainte
MUNI.....	Municipal	STAR.....	Standard Terminal Arrival
N/A.....	Not Applicable	TAA.....	Terminal Arrival Area
NA.....	Not Authorized	TACAN.....	Tactical Air Navigation
NAAS.....	Naval Auxiliary Air Station	TCH.....	Threshold Crossing Height
NAF.....	Naval Air Facility	TDZ.....	Touchdown Zone
NALF.....	Naval Auxiliary Landing Field	TDZE.....	Touchdown Zone Elevation
NAS.....	Naval Air Station	TDZ/CL.....	Touchdown Zone and Runway Centerline Lighting
NDB.....	Nondirectional Radio Beacon	TDZL.....	Touchdown Zone Lights
NM.....	Nautical Mile	THR.....	Threshold
NOLF.....	Naval Outlying Field	TODA.....	Takeoff Distance Available
NoPT.....	No Procedure Turn	TORA.....	Takeoff Run Available
NOTAM.....	Notice to Air Missions	tr.....	Track
NS.....	Naval Station	TRML.....	Terminal
NTL.....	National	TWR.....	Tower
ODALS.....	Omnidirectional Approach Lighting System	UNICOM.....	Universal Communications Station
ODP.....	Obstacle Departure Procedure	USA.....	United States Army
OM.....	Outer Marker	USAF.....	United States Air Force

ABBREVIATIONS 24249


USCG.....	United States Coast Guard
USMC.....	United States Marine Corps
USN.....	United States Navy
USSF.....	United States Space Force
VASI.....	Visual Approach Slope Indicator
VCOA.....	Visual Climb Over Airport
VDA.....	Vertical Descent Angle
VDP.....	Visual Descent Point
VFR.....	Visual Flight Rules
VGSI.....	Visual Glide Slope Indicator
VNAV.....	Vertical Navigation
VOR.....	Very High Frequency Omni-Directional Range
VORTAC.....	Very High Frequency Omni-Directional Range/Tactical Air Navigation
WAAS.....	Wide Area Augmentation System
WP/WPT.....	Waypoint

NE-2, 31 OCT 2024 to 26 DEC 2024

NE-2, 31 OCT 2024 to 26 DEC 2024

PLANVIEW SYMBOLS

ROUTES

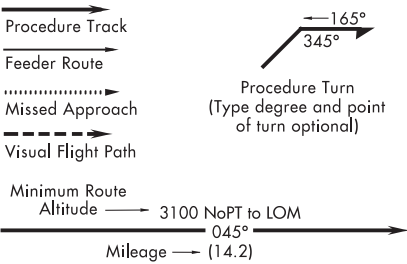

ALTITUDES


<u>5500</u> Mandatory Altitude	3000 Recommended Altitude
<u>2500</u> Minimum Altitude	<u>5000</u> Mandatory Block
4300 Maximum Altitude	3000 Altitude

INDICATED AIRSPEED

<u>175K</u>	<u>120K</u>	<u>250K</u>	180K
Mandatory Airspeed	Minimum Airspeed	Maximum Airspeed	Recommended Airspeed

HOLDING PATTERNS


Hold-in-lieu of Procedure Turn

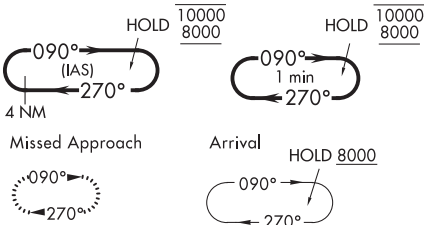


Holding pattern with maximum restricted airspeed: (175K) applies to all altitudes. (210K) applies to altitudes above 6000' to and including 14000'. Arrival Holding Pattern altitude restrictions will be indicated when they deviate from the adjacent leg.

Timing or distance limits for Hold-in-lieu of Procedure Turn Holding Patterns will be shown. DME fixes may be shown.

FIXES/ATC REPORTING REQUIREMENTS

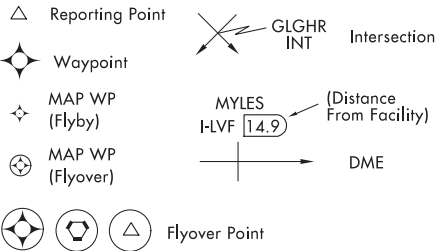


x (CFTSP) Computer Navigation Fix (CNF)-No ATC Function ("x" omitted when it is a MAP)



RADIO AIDS TO NAVIGATION



110.1 Underline indicates No Voice transmitted on this frequency

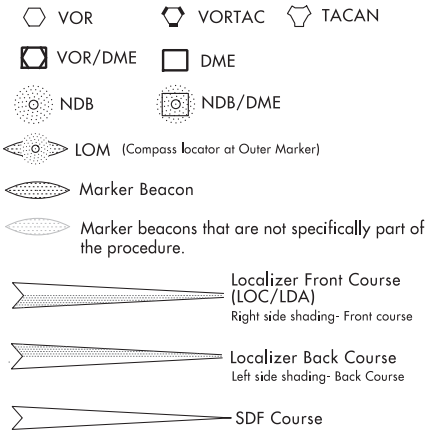


○ LOC/LDA/SDF Transmitter □ LOC/DME (shown when installation is offset from its normal position off the end of the runway.)

Primary NAVAID

Secondary NAVAID



TACAN or DME NAVAID




LEGEND 23110

INSTRUMENT APPROACH PROCEDURES (CHARTS)


PLANVIEW SYMBOLS

MINIMUM SAFE ALTITUDE (MSA)

Facility Identifier






Airport Identifier



(arrows on distance circle identify sectors)


TERMINAL ARRIVAL AREA (TAA)



MISCELLANEOUS



VOR Changeover Point



End of Rwy Coordinates (DoD only)



R-Restricted
P-Prohibited
MOA-Military Operations Area

W-Warning
A-Alert



Distance not to scale



International Boundary



Air Defense Identification Zone

AIRPORTS



Primary and Secondary (named in planview)



Seaplane Base



Joint (Civil-Military)

OBSTACLES

• Spot Elevation



Highest Obstacle

• Highest Spot Elevation



Group of Obstacles



Doubtful accuracy

LEGEND 23110


LEGEND 22251

INSTRUMENT APPROACH PROCEDURES (CHARTS)


PROFILE VIEW

- Three different methods are used to depict either electronic or vertical guidance: "GS", "GP", or "VDA".
- "GS" indicates that an Instrument Landing System (ILS) electronic glide slope (a ground antenna) provides vertical guidance. The profile section of ILS procedures depict a GS angle and TCH in the following format: $\angle 3.00^\circ$ TCH 55
 - "GP" on GLS and RNAV procedures indicates that either electronic vertical guidance (via Wide Area Augmentation System - WAAS or Ground Based Augmentation System - GBAS) or barometric vertical guidance is provided. GLS and RNAV procedures with a published decision altitude (DA/H) depict a GP angle and TCH in the following format: $\angle 3.00^\circ$ TCH 50
 - An advisory vertical descent angle (VDA) is provided on non-vertically guided conventional procedures and RNAV procedures with only a minimum descent altitude (MDA) to assist in preventing controlled flight into terrain. On Civil (FAA) procedures, this information is placed above or below the procedure track following the fix it is based on. Absence of a VDA or a note that the VDA is not authorized indicates that the prescribed obstacle clearance surface is not clear and the VDA must not be used below MDA. VDA is depicted in the following format: $\angle 3.00^\circ$ TCH 55. On Copter procedures this is depicted in the following format: $\angle 7.30^\circ$ HCH 20


ILS or LOC APPROACH

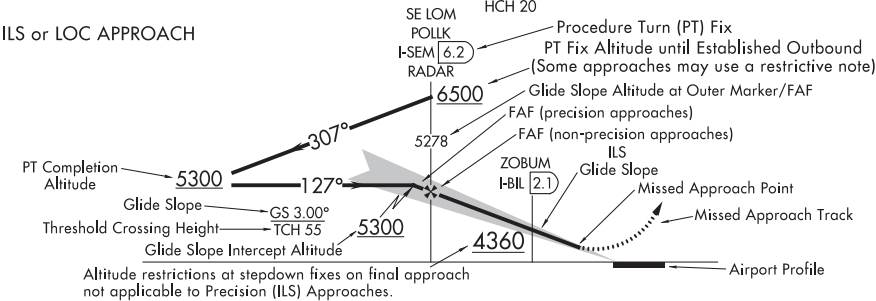


RNAV and GLS PROCEDURES WITH VERTICAL GUIDANCE

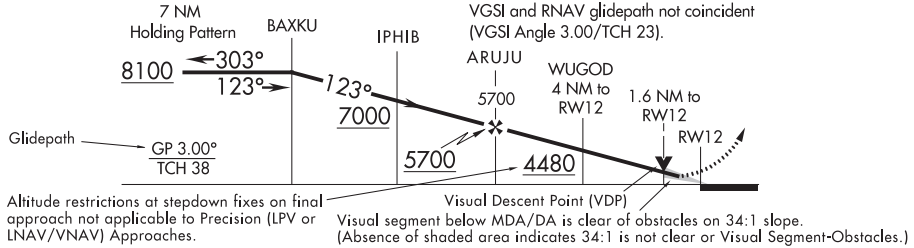


NON-VERTICALLY GUIDED CONVENTIONAL PROCEDURES AND RNAV PROCEDURES WITH MDA ONLY

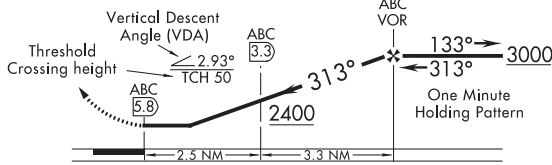

DESCENT FROM HOLDING PATTERN



RNP APPROACH WITH TF AND RF SEGMENTS

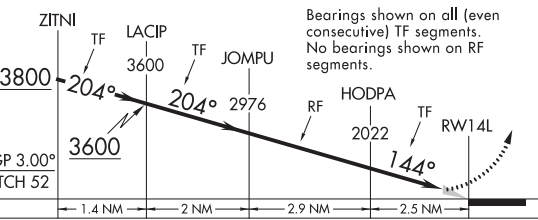

5500	Mandatory Altitude	3000	Recommended Altitude
2500	Minimum Altitude	5000	Mandatory Block
4300	Maximum Altitude	3000	Altitude

PROFILE SYMBOLS

- Glide Slope/Glidepath Intercept Altitude and final approach fix for vertically guided approach procedures.
- Visual Descent Point (VDP)
- Visual Flight Path
- Note: Facilities and waypoints are depicted as a solid vertical line while fixes and intersections are depicted as a dashed vertical line.

LEGEND 22251



LEGEND 23334 STANDARD TERMINAL ARRIVAL (STAR) CHARTS

RADIO AIDS TO NAVIGATION


Compulsory:



Non-Compulsory:

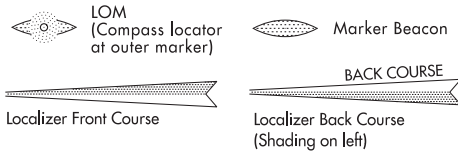


Underline indicates no voice transmitted on this frequency



(Y) TACAN must be placed in "Y" mode to receive distance information


ROUTES

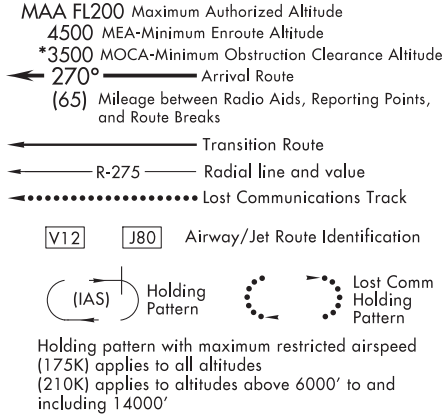


SPECIAL USE AIRSPACE



ALTITUDES

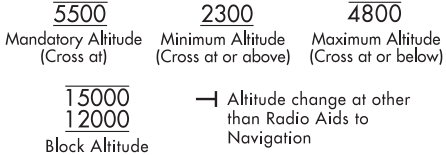


FIXES/ATC REPORTING REQUIREMENTS

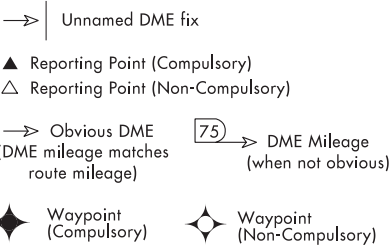

INDICATED AIRSPEED



MISCELLANEOUS

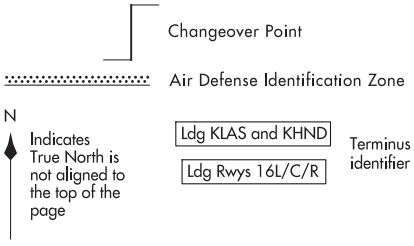

AIRPORTS



NE-2, 31 OCT 2024 to 26 DEC 2024

NE-2, 31 OCT 2024 to 26 DEC 2024

LEGEND 23334


DEPARTURE PROCEDURE (DP) CHARTS

RADIO AIDS TO NAVIGATION


Compulsory:




Non-Compulsory:

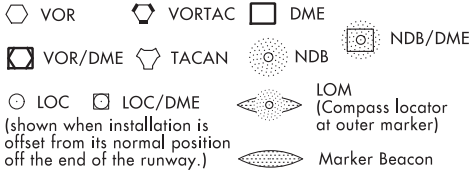

(shown when installation is offset from its normal position off the end of the runway.)




(T) indicates frequency protection range



Underline indicates no voice transmitted on this frequency

TACAN or DME NAVIAID Box



VHF Paired Frequency

(Y) TACAN must be placed in "Y" mode to receive distance information

FIXES/ATC REPORTING REQUIREMENTS

→ | Unnamed DME fix

▲ Reporting Point (Compulsory)

△ Reporting Point (Non-Compulsory)

→ Obvious DME (DME mileage matches route mileage) [75] → DME Mileage (when not obvious)

Waypoint (Compulsory) Waypoint (Non-Compulsory)

Flyover Point


x Computer Navigation Fix (CFTSP) x Computer Navigation Fix (CNF) - No ATC Function

MISCELLANEOUS



▼ Takeoff Minimums and (Obstacle) Departure Procedures entry published.

ROUTES

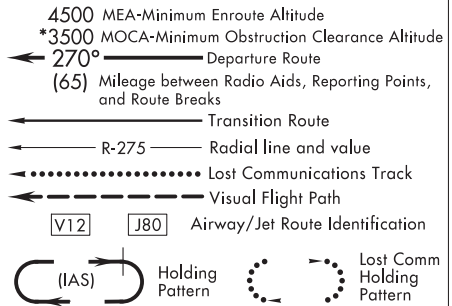


Holding pattern with maximum restricted airspeed (175K) applies to all altitudes (210K) applies to altitudes above 6000' to and including 14000'

SPECIAL USE AIRSPACE



R-Restricted W-Warning P-Prohibited A-Alert MOA-Military Operations Area

ALTITUDES



TOP ALTITUDE: 5000 Top altitude restriction


INDICATED AIRSPEED



AIRPORTS



MINIMUM SAFE ALTITUDE (MSA)

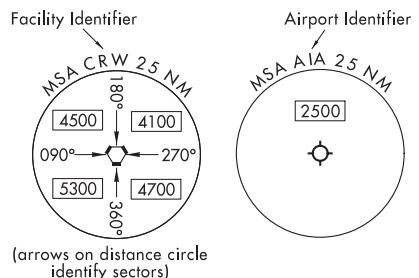

(arrows on distance circle identify sectors)

LEGEND 23334

LEGEND

INSTRUMENT APPROACH PROCEDURES (CHARTS)

AIRPORT DIAGRAM/AIRPORT SKETCH

Runways

Hard Surface

Other Than Hard Surface

Taxiways, Parking Areas

Stopways, Overruns, Blast Pads

Metal Surface

Closed Runway

Closed Surface

Non-Movement

Under Construction

Water Runway

ARRESTING GEAR: Specific arresting gear systems; e.g., BAK12, MA-1A etc., shown on airport diagrams, not applicable to Civil Pilots. Military Pilots refer to appropriate DOD publications.

uni-directional

bi-directional

Jet Barrier

ARRESTING SYSTEM (EMAS)

REFERENCE FEATURES

Displaced Threshold.....

Hot Spot.....

Runway Holding Position Markings.....

Buildings.....

Self-Serve Fuel ##.....

Tanks.....

Obstructions.....

Airport Beacon #.....

Runway Radar Reflectors.....

Bridges.....

Control Tower #..... TWR

Wind Cone..... Unlit Lit

Landing Tee.....

Tetrahedron.....

When Control Tower and Rotating Beacon are co-located, Beacon symbol will be used and further identified as TWR.

See appropriate Chart Supplement for information.

Runway Weight Bearing Capacity or Pavement Classification Number (PCN)/Pavement Classification Rating (PCR) is shown as a codified expression. Refer to the appropriate Supplement/Directory for applicable codes e.g., RWY 14-32 PCR 560 R/B/W/T; S-75, D-185, 2D-325, 2D/2D2-1120

Helicopter Alighting Areas

Negative Symbols used to identify Copter Procedures landing point.....

NOTE:
Landmark features depicted on Copter Approach insets and sketches are provided for visual reference only.

Runway TDZ elevation.....TDZE 123

Runway Slope..... 0.3% Down.....0.8% UP
(shown when rounded runway slope is $\geq 0.3\%$)

NOTE:
Runway Slope measured to midpoint on runways 8000 feet or longer.

U.S. Navy Optical Landing System (OLS) "OLS" location is shown because of its height of approximately 7 feet and proximity to edge of runway may create an obstruction for some types of aircraft.

Approach light symbols are shown in the Flight Information Handbook.

Airport diagram scales are variable.

True/magnetic North orientation may vary from diagram to diagram

Coordinate values are shown in 1 or 1/2 minute increments. They are further broken down into 6 second ticks, within each 1 minute increments.


Positional accuracy within ± 600 feet unless otherwise noted on the chart.

Runway length depicted is the physical length of the runway (end-to-end, including displaced thresholds if any) but excluding areas designated as stopways.

A symbol is shown to indicate runway declared distance information available, see appropriate Chart Supplement for distance information.

NOTE:
All new and revised airport diagrams are shown referenced to the World Geodetic System (WGS) (noted on appropriate diagram), and may not be compatible with local coordinates published in DoD FLIP. (Foreign Only)


The airport sketch box includes the final approach course or final approach course extended.

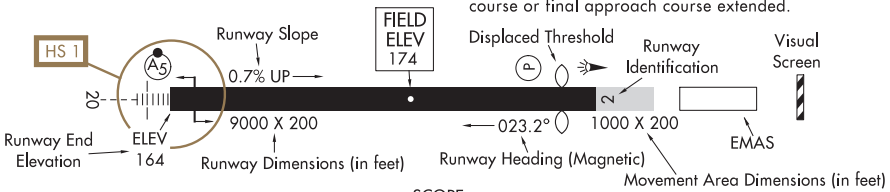

Airport diagrams are specifically designed to assist in the movement of ground traffic at locations with complex runway/taxiway configurations. Airport diagrams are not intended to be used for approach and landing or departure operations. For revisions to Airport Diagrams: Consult FAA Order 7910.4.

LEGEND

A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A₁). Negative symbology, e.g., (A₁), (V) indicates Pilot Controlled Lighting (PCL).



AVAILABILITY of TDZ/CL will be shown by
NOTE in SKETCH e.g. "TDZ/CL Rwy 15"


LEGEND 22195

INSTRUMENT APPROACH PROCEDURES (CHARTS)
APPROACH LIGHTING SYSTEM - UNITED STATES

Approach lighting and visual glide slope systems are indicated on the airport sketch by an identifier, (A₂), (V) etc.


A dot "•" portrayed with approach lighting letter identifier indicates sequenced flashing lights (F) installed with the approach lighting system e.g., (A₁). Negative symbology, e.g., (A₁), (V) indicates Pilot Controlled Lighting (PCL).

(P) **PRECISION APPROACH
PATH INDICATOR**

PAPI

Legend: □ White ■ Red

(V₂) **PULSATING VISUAL APPROACH
SLOPE INDICATOR**

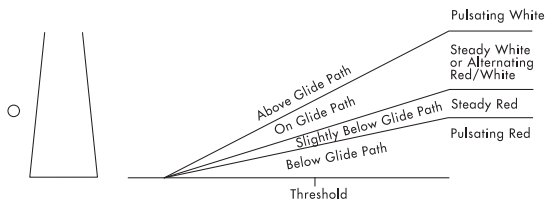PVASI


CAUTION: When viewing the pulsating visual approach slope indicators in the pulsating white or pulsating red sectors, it is possible to mistake this lighting aid for another aircraft or a ground vehicle. Pilots should exercise caution when using this type of system.

(V) **VISUAL APPROACH
SLOPE INDICATOR**


VASI

VISUAL APPROACH SLOPE INDICATOR WITH STANDARD THRESHOLD CLEARANCE PROVIDED.

ALL LIGHTS WHITE — TOO HIGH
FAR LIGHTS RED
NEAR LIGHTS WHITE — ON GLIDE SLOPE
ALL LIGHTS RED — TOO LOW

**VASI 12**

(V₄) **TRI-COLOR VISUAL APPROACH
SLOPE INDICATOR**



TRCV

CAUTION: When the aircraft descends from green to red, the pilot may see a dark amber color during the transition from green to red.

(V₃) **VISUAL APPROACH
SLOPE INDICATOR**

VASI

3-BAR, 6 OR 16 BOX, VISUAL APPROACH SLOPE INDICATOR THAT PROVIDES 2 GLIDE ANGLES AND 2 THRESHOLD CROSSING HEIGHTS.

**ALIGNMENT OF ELEMENTS SYSTEMS****APAP**

Painted panels which may be lighted at night.
To use the system the pilot positions the aircraft so the elements are in alignment.

LEGEND 22195

FREQUENCY PAIRING TABLE

TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY	TACAN CHANNEL	VHF FREQUENCY
17Y	108.05	40X	110.30	88Y	114.15
18X	108.10	40Y	110.35	89Y	114.25
18Y	108.15	41Y	110.45	90Y	114.35
19Y	108.25	42X	110.50	91Y	114.45
20X	108.30	42Y	110.55	92Y	114.55
20Y	108.35	43Y	110.65	93Y	114.65
21Y	108.45	44X	110.70	94Y	114.75
22X	108.50	44Y	110.75	95Y	114.85
22Y	108.55	45Y	110.85	96Y	114.95
23Y	108.65	46X	110.90	97Y	115.05
24X	108.70	46Y	110.95	98Y	115.15
24Y	108.75	47Y	111.05	99Y	115.25
25Y	108.85	48X	111.10	100Y	115.35
26X	108.90	48Y	111.15	101Y	115.45
26Y	108.95	49Y	111.25	102Y	115.55
27Y	109.05	50X	111.30	103Y	115.65
28X	109.10	50Y	111.35	104Y	115.75
28Y	109.15	51Y	111.45	105Y	115.85
29Y	109.25	52X	111.50	106Y	115.95
30X	109.30	52Y	111.55	107Y	116.05
30Y	109.35	53Y	111.65	108Y	116.15
31Y	109.45	54X	111.70	109Y	116.25
32X	109.50	54Y	111.75	110Y	116.35
32Y	109.55	55Y	111.85	111Y	116.45
33Y	109.65	56X	111.90	112Y	116.55
34X	109.70	56Y	111.95	113Y	116.65
34Y	109.75	80Y	113.35	114Y	116.75
35Y	109.85	81Y	113.45	115Y	116.85
36X	109.90	82Y	113.55	116Y	116.95
36Y	109.95	83Y	113.65	117Y	117.05
37Y	110.05	84Y	113.75	118Y	117.15
38X	110.10	85Y	113.85	119Y	117.25
38Y	110.15	86Y	113.95		
39Y	110.25	87Y	114.05		


See the Chart Supplement for a complete listing.

INSTRUMENT TAKEOFF OR APPROACH PROCEDURE CHARTS
RATE OF CLIMB/DESCENT TABLE
 (ft per min)

A rate of climb/descent table is provided for use in planning and executing climbs or descents under known or approximate ground speed conditions. It will be especially useful for approaches when the localizer only is used for course guidance. A best speed, power, altitude combination can be programmed which will result in a stable glide rate and altitude favorable for executing a landing if minimums exists upon breakout. Care should always be exercised so that minimum descent altitude and missed approach point are not exceeded.

ft/NM	%	GROUND SPEED (knots)											ANGLE
		60	90	120	150	180	210	240	270	300	330	360	
152	2.50	150	230	300	380	460	530	610	680	760	840	910	1.43
200	3.29	200	300	400	500	600	700	800	900	1000	1100	1200	1.89
210	3.46	210	320	420	530	630	740	840	950	1050	1160	1260	1.98
220	3.62	220	330	440	550	660	770	880	990	1100	1210	1320	2.07
230	3.79	230	350	460	580	690	810	920	1040	1150	1270	1380	2.17
240	3.95	240	360	480	600	720	840	960	1080	1200	1320	1440	2.26
250	4.11	250	380	500	630	750	880	1000	1130	1250	1380	1500	2.36
260	4.28	260	390	520	650	780	910	1040	1170	1300	1430	1560	2.45
270	4.44	270	410	540	680	810	950	1080	1220	1350	1490	1620	2.54
280	4.61	280	420	560	700	840	980	1120	1260	1400	1540	1680	2.64
290	4.77	290	440	580	730	870	1020	1160	1310	1450	1600	1740	2.73
300	4.94	300	450	600	750	900	1050	1200	1350	1500	1650	1800	2.83
310	5.10	310	470	620	780	930	1090	1240	1400	1550	1710	1860	2.92
320	5.27	320	480	640	800	960	1120	1280	1440	1600	1760	1920	3.01
330	5.43	330	500	660	830	990	1160	1320	1490	1650	1820	1980	3.11
340	5.60	340	510	680	850	1020	1190	1360	1530	1700	1870	2040	3.20
350	5.76	350	530	700	880	1050	1230	1400	1580	1750	1930	2100	3.30
360	5.92	360	540	720	900	1080	1260	1440	1620	1800	1980	2160	3.39
370	6.09	370	560	740	930	1110	1300	1480	1670	1850	2040	2220	3.48
380	6.25	380	570	760	950	1140	1330	1520	1710	1900	2090	2280	3.58
390	6.42	390	590	780	980	1170	1370	1560	1760	1950	2150	2340	3.67
400	6.58	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	3.77
450	7.41	450	680	900	1130	1350	1580	1800	2030	2250	2480	2700	4.24
500	8.23	500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	4.70
550	9.05	550	830	1100	1380	1650	1930	2200	2480	2750	3030	3300	5.17

U.S. TERMINAL PUBLICATION VOLUMES

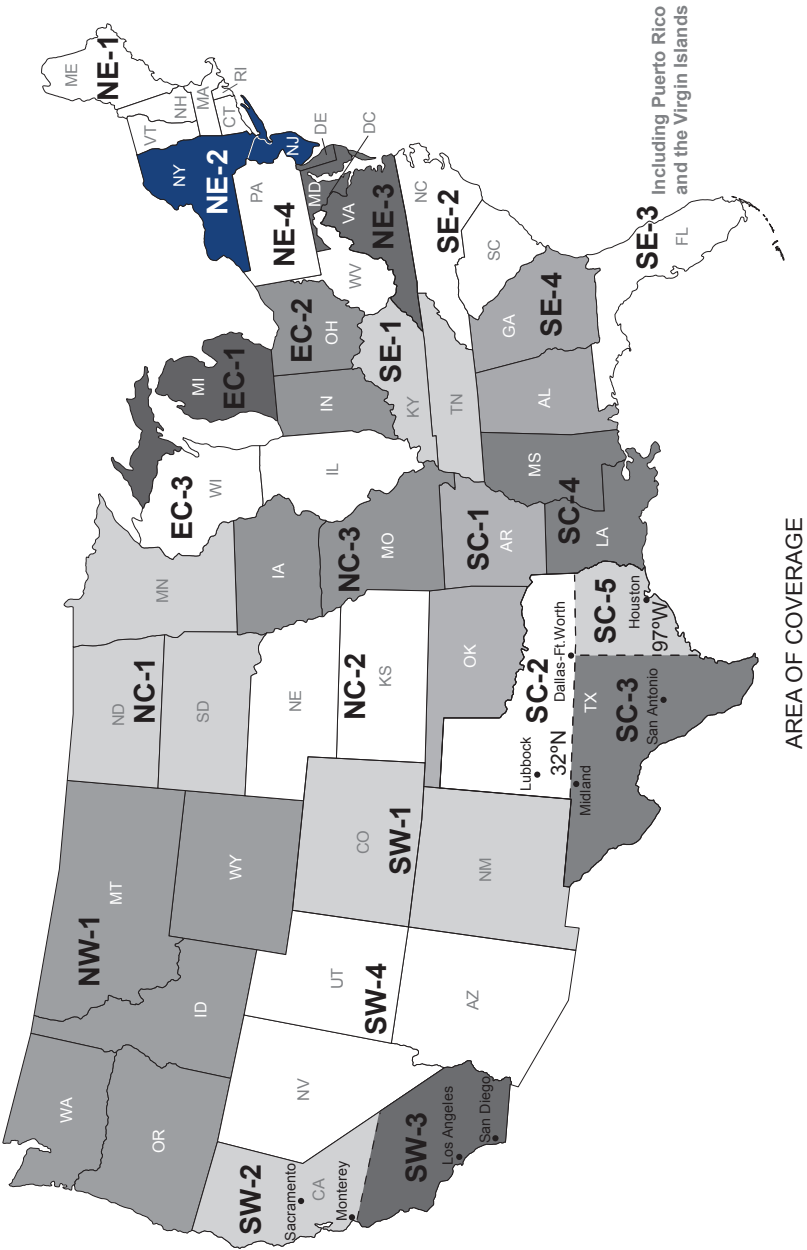

FAA Product ID: BTPPNE2



NSN 7641015059583

NGA REF. NO.
OK-10-2859

TERMXFAABTPPNE2



EFF. DATE 24305